

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A61J 9/00, 9/04</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/11218</b> (43) International Publication Date: 11 March 1999 (11.03.99)
<p>(21) International Application Number: PCT/US98/10347</p> <p>(22) International Filing Date: 21 May 1998 (21.05.98)</p> <p>(30) Priority Data: 08/923,372 3 September 1997 (03.09.97) US</p> <p>(71) Applicant: PLAYTEX PRODUCTS, INC. [US/US]; 300 Nyala Farms Road, Westport, CT 06880 (US).</p> <p>(72) Inventor: CHOMIK, Richard, S.; 547 Willow Avenue, Garwood, NJ 07027 (US).</p> <p>(74) Agent: RUGGIERO, Charles, N., J.; Ohlandt, Greeley, Ruggiero &amp; Perle, L.L.C., 9th floor, One Landmark Square, Stamford, CT 06901-2682 (US).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report. With amended claims.</p>	

(54) Title: IMPROVED INFANT FEEDING BOTTLE WITH PRESSURE EQUALIZING DIAPHRAGM

## (57) Abstract

A bottle assembly (10) includes a bottle (12) having a first open end (14) and a second open end (16), a nipple assembly (18) affixed to the first open end, a vented cap (22) affixed to the second open end, and an elastomeric diaphragm (20) affixed to the second open end by the vented cap. The vented cap has at least one slot. The elastomeric diaphragm has a plurality of resealable perforations and at least one integral tab extending therefrom. The integral tab is adapted to be inserted into and seal the slot.

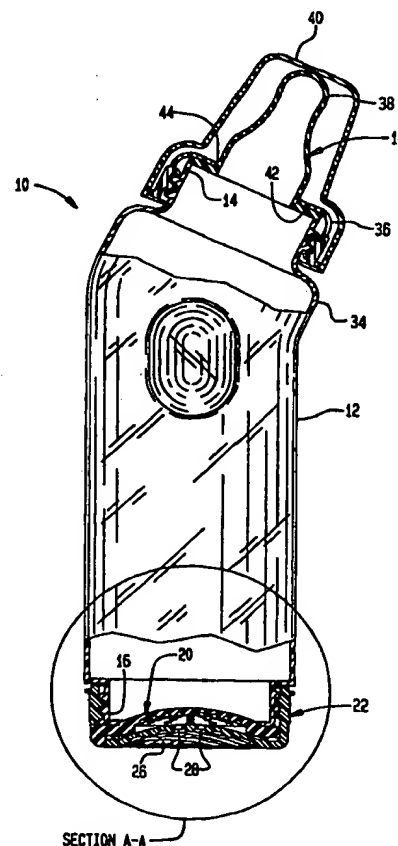

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**IMPROVED INFANT FEEDING BOTTLE  
WITH PRESSURE EQUALIZING DIAPHRAGM**

**FIELD OF THE INVENTION**

5           The present invention relates generally to an improved infant feeding bottle assembly. More particularly, the present invention relates to an infant feeding bottle assembly having an improved pressure equalizing diaphragm that alleviates the vacuum created in the bottle during feeding, while preventing leakage around the pressure equalizing diaphragm.

10

**BACKGROUND OF THE INVENTION**

          Baby bottles having flexible nipples are commonly used to feed infants and children milk, formula, juices and other fluids. During use, however, as the baby sucks on the nipple and withdraws the fluid, a partial vacuum is formed within the bottle. This vacuum can make feeding more difficult, by requiring the baby to suck with much greater force, which can discourage the baby and cause it to stop feeding sooner than desired. Moreover, the vacuum can cause the nipple to collapse.

          To address this problem, a variety of vented bottle assemblies have been developed. One such method involves the use of a perforated elastomeric diaphragm attached to the bottom of the bottle. This diaphragm allows air in to alleviate the vacuum when the bottle is inverted and fluid is withdrawn. When the bottle is upright, however, and fluid is

resting on the diaphragm, the perforations are effectively sealed and fluid does not pass through the perforations.

This bottle assembly, and a related process for equalizing pressure in a bottle, are disclosed and claimed in U.S. Patent No. 5,499,729 to Greenwood et al., which issued on March 19, 1996. The teachings of that patent are herein incorporated by reference. The bottle assembly claimed in the Greenwood et al. patent provides excellent vacuum control and fluid flow, in combination with ease of cleaning. However, the structure as disclosed in the Greenwood et al. patent suffers from one drawback. The diaphragm is merely pressed into engagement with the cap, and is only loosely retained therein by the threads of the cap before the cap is screwed onto the bottle. It is not affixed to the cap. While fluid does not leak through the multiple perforations in the central portion of the diaphragm, many users have experienced leakage due to improper placement of the diaphragm in its securing cap. If the elastomeric rim of the diaphragm is not replaced properly in the cap after cleaning, a seal will not form between the bottom lip of the bottle, the diaphragm's rim, and the cap. Fluid will then leak around the diaphragm and out of the air holes in the cap. Moreover, the typical user may not understand what is causing the leakage, and may wrongly attribute it to the perforations in the diaphragm. In addition, the loose diaphragm, separate from the remainder of the assembly, may be found and swallowed by a small child.

Accordingly, an improved bottle assembly is required that ensures that the diaphragm is properly and sealingly seated in the cap, to prevent

leakage of fluid from the assembly. Moreover, such an improved assembly permits a user to disassemble and reassemble conveniently and without the concern that leakage will occur due to misalignment.

5

### SUMMARY OF THE INVENTION

Thus, it is an object of the present invention to provide an improved bottle assembly that is leak-proof when upright.

It is a further object of the present invention to provide an improved diaphragm and cap assembly that ensures a secure seal, and that  
10 minimizes the possibility of improper assembly by the user.

It is yet a further object of the present invention to provide an improved diaphragm and cap assembly that can remain assembled indefinitely to ensure a proper seal and to minimize the chance that the flexible diaphragm could be found and swallowed by a child.

15 It is a further object of the present invention to provide an improved diaphragm, cap and bottle holder assembly that is easy to clean and easy to assemble.

Accordingly, the present invention provides a bottle assembly including a bottle having a first open end and a second open end, a nipple  
20 assembly affixed to the first open end, a vented cap affixed to the second open end, the vented cap having at least one slot; and an elastomeric diaphragm affixed to the second open end by the vented cap. The elastomeric diaphragm has a plurality of resealable perforations and at

least one integral tab extending therefrom. The integral tab is adapted to be inserted into and seal the slot.

### BRIEF DESCRIPTION OF THE DRAWINGS

5           Figure 1 is a side view of a preferred bottle assembly of the present invention;

          Figure 2A is a cross-sectional view of the bottle assembly of Figure 1;

          Figure 2B is an enlarged view of the Section A-A of Figure 2A;

10          Figure 3 is a top view of a preferred diaphragm of the present invention;

          Figure 4 is a side view of the diaphragm of Figure 3;

          Figure 5 is a top view of a preferred cap of the present invention;  
and

15          Figure 6 is a top view of the assembled diaphragm of Figure 3 and cap of Figure 5.

### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to the figures and, in particular, Figures 1, 2A and 2B, the  
20   improved bottle assembly of the present invention is generally referred to by reference numeral 10. The bottle assembly 10 includes a cylindrical bottle 12 having a first open end 14 and a second open end 16. In the preferred embodiment shown in Figure 1, the first open end 14 and the second open end 16 are threaded. The bottle assembly 10 may also

include a nipple assembly 18 adapted to be secured to the first end 14 and an elastomeric diaphragm 20 adapted to be secured to the second end 16. The elastomeric diaphragm 20 is preferably mounted to the second end 16 by a mating threaded cap 22. The elastomeric diaphragm 20 has  
5 resealable perforations 24 therethrough (see Figures 3 and 4) in multiple locations, to permit air to flow in when a partial vacuum is formed in the bottle 12 during feeding. The threaded cap 22 has a domed base 26 with air vents 28.

According to the improvements of the present invention, the  
10 elastomeric diaphragm 20 has at least one integral tab 30 (best seen in Figures 3 and 4). In the preferred embodiment shown in Figures 3 and 4, the elastomeric diaphragm 20 has three integral tabs 30. In conjunction, the cap 22 has a corresponding number of mating slots 32 (see Figure 5) about its circumference. The integral tabs 30 of the elastomeric diaphragm  
15 20 are designed to lock into the slots 32 of the cap 22. This improvement ensures that the elastomeric diaphragm 20 is properly and securely seated in cap 22, so that a leak-proof seal will be formed when the cap bearing the diaphragm 20 is attached to the bottle 12.

As shown in Figures 1 and 2, the bottle assembly 10 of this  
20 preferred embodiment includes cylindrical bottle 12. The bottle 12 is preferably transparent, to allow the contents and interior of the bottle 12 to be seen during feeding and cleaning. Thus, bottle 12 is preferably reusable. The neck 34 of the bottle 12 is preferably angled to facilitate feeding. Both first and second ends 14, 16 of the bottle 12 are open and,



as stated above, each is preferably threaded. The nipple assembly 18 is mounted to the first end 14 of the bottle 12, and preferably includes a threaded retaining ring 36 that is adapted to be removably secured to threaded first end 14, a nipple 38 and a protective lid 40. The nipple 38  
5 preferably includes an annular mounting flange 42. In a preferred embodiment, the threaded retaining ring 36 has a central aperture 44 through which the nipple 38 projects, while mounting flange 42 is held against the retaining ring 36. The flange 42 of the nipple 38 then seals against the first end 14 of the bottle 12 when the retaining ring 36 is  
10 screwed onto the bottle.

It is important, for proper functioning of elastomeric diaphragm 20, that the nipple 38 does not have a vent in its flange 42 or elsewhere, apart from its drinking aperture. Elastomeric diaphragm 20, not a separate vent on the nipple 38, acts as the bottle's vent. Eliminating a vent in the nipple  
15 38 can help to make the nipple essentially dripless, although the preferred Y-cut opening in the nipple (instead of the traditional through hole) is primarily responsible for ensuring that the nipple is dripless. A protective lid 40 can then be removably attached to the retaining ring 36 to keep the nipple 38 sanitary and to catch any leakage of fluid through the nipple.

20 As shown in Figures 3 and 4, the improved elastomeric diaphragm 20 of the present invention is slightly domed in contour, and has a plurality of perforations 24. The perforations 24 are preferably formed through the centers of a plurality of dish-shaped depressions (not shown) formed in the diaphragm 20. The perforations 24 can be pinpoint (i.e., circular)

perforations or small slit perforations, or can be any other resealable configuration. The perforations 24 are arranged in a starburst pattern, as shown in Figure 3. However, other geometric or random patterns are also suitable. It is the number, concentration and type of perforations, not their pattern, that is most relevant to their performance. Most preferably, about 5 48 holes are arranged close together in a compact area of the diaphragm 20. The circumference 48 of the diaphragm 20 is flattened top and bottom to form a seating and sealing surface. Extending from and below the circumference 48 are three integrally formed tabs 30. As shown in Figure 10 4, each tab 30 has a flat top surface 50, a straight first side 52 and a curved second side 54, thus forming a gripping projection.

As shown in Figure 5, the threaded cap 22 has three slots 32 that are generally rectangular in shape and are formed to accept and lock in the corresponding number of tabs 30 of the diaphragm 20. The cap 22 has a 15 somewhat domed inverted base 26 bearing air vents 28. The domed shape of inverted base 26 preferably is similar to that of the elastomeric diaphragm 20.

The cap 22 preferably is supplied pre-assembled, with the elastomeric diaphragm 20 seated in the cap and with the tabs 30 locked 20 into the slots 32 of the cap. While the diaphragm 20 is removable by the consumer, it can also be left in place through multiple uses and washings. The size of the air vents 28 permits the underside of the diaphragm 20 to be cleaned and sanitized sufficiently without removal. Moreover, if the diaphragm 20 is removed between uses, the tabs 30 ensure that the

diaphragm 20 is replaced properly before the next use. Until the tabs 30 are properly engaged, the diaphragm 20 will not seat properly in the cap 22, but will bulge upwardly. Moreover, the tabs 30 can be viewed from the outside of the cap 22 when inserted through the slots 32. Because the

5 second side 54 of the tabs 30 is situated on the outside, and is curved to match the outer contour of the cap 22, it is readily seen when the tabs are only partially inserted through the slots 32. When the tabs 30 are fully inserted through the slots 32, the outside of the cap 22 has a smooth, uninterrupted contour in the area of the slots and tabs. The tabs 30 must

10 be of sufficient size to seal the slots 32 against leakage of fluid, but must not be so large as to be overly difficult to insert into the slots. Most preferably, the slots 32 and tabs 30 are of roughly equivalent length and curvature. In addition, the use of a flexible, compressible elastomeric material, such as a moldable elastomer (such as silicone), is preferred for

15 the diaphragm 20, because it allows easy insertion of the tabs 30 into slots 32, without sacrificing an effective seal.

The tabs 30 also perform an important safety function. The elastomeric diaphragm 20, when engaged by tabs 30 into cap 22, can minimize the safety hazard of a small child finding the diaphragm 20

20 disassembled from the bottle assembly 10. The diaphragm 20, if loose in cap 22 or if separated from the cap, could potentially be chewed or ingested by a small child. Thus, the tabs 30, by allowing the elastomeric diaphragm 20 to be locked into the cap 22, serve to minimize the chance that a child will be harmed by ingesting or chewing the diaphragm.

It is obvious that the tabs 30 and slots 32 of the present invention can take on a variety of interlocking configurations. While three sets of tabs 30 and slots 32 are preferred, any number of sets can be used. In addition, a slot or other aperture on the diaphragm could be sealingly  
5 engaged by a tab or other protrusion on the interior surface of the cap. Any structures sufficient to affix the diaphragm to the cap, while preventing fluid leakage, are within the scope of the present invention. These structures may be integral to the cap, the diaphragm, or both, or can be independent clips, retaining rings or other such devices. In addition,  
10 structures other than the cap disclosed herein can be used to mount the diaphragm to the bottle.

Various modifications may be made as will be apparent to those skilled in the art. Thus, it will be obvious to one of ordinary skill in the art that the foregoing description and drawings are merely illustrative of certain  
15 preferred embodiments of the present invention, and that various obvious modifications can be made to these embodiments in accordance with the spirit and scope of the appended claims.

What is claimed is:

1. A bottle assembly comprising:
  - a bottle having a first open end and a second open end;
  - 5 a nipple assembly adapted to be mounted to said first open end;
  - a vented cap adapted to be mountable to said second open end,
  - said vented cap having at least one slot therein; and
  - an elastomeric diaphragm mounted to said second open end by
  - said vented cap, wherein said elastomeric diaphragm has a plurality of
  - 10 resealable perforations therethrough and at least one integral tab
  - extending therefrom,
  - wherein said at least one integral tab is adapted to be inserted into
  - and seal said at least one slot.
- 15 2. The bottle assembly of claim 1, wherein said elastomeric diaphragm has three integral tabs extending therefrom, and wherein said vented cap has three slots adapted to accept said three integral tabs.
3. The bottle assembly of claim 1, wherein said at least one
- 20 integral tab forms a gripping projection.
4. The bottle assembly of claim 1, wherein said at least one integral tab and said at least one slot are of equivalent length and curvature.

5. The bottle assembly of claim 1, wherein said at least one integral tab has an outer contour that conforms to an outer contour of said cap adjacent said at least one slot.

5

6. The bottle assembly of claim 1, wherein said perforations open to permit air inflow in response to a partial vacuum formed within said bottle during feeding.

10 7. The bottle assembly of claim 1, wherein said vented cap includes an inverted domed base, and wherein said diaphragm is domed.

8. The bottle assembly of claim 7, wherein said inverted domed base has a contour and said diaphragm has a contour, and wherein the  
15 contours of said inverted domed base and said diaphragm are equivalent.

9. The bottle assembly of claim 1, wherein said vented cap includes at least one venting aperture, and said at least one venting aperture is of sufficient size to permit cleaning of said elastomeric  
20 diaphragm when said elastomeric diaphragm is affixed to said vented cap.

10. The bottle assembly of claim 1, wherein said at least one integral tab prevents said elastomeric diaphragm from seating properly in

said vented cap until said at least one integral tab is fully inserted into said at least one slot.

11. The bottle assembly of claim 1, wherein said at least one  
5 integral tab is visible from outside said bottle assembly when said at least one integral tab is inserted into said at least one slot.

12. The bottle assembly of claim 1, wherein said elastomeric diaphragm is made of a moldable elastomer.

10

13. A bottle assembly comprising:  
a bottle having a first open end and a second open end;  
a nipple assembly removably affixed to said first open end;  
a vented cap removably affixed to said second open end; and  
15 an elastomeric diaphragm removably affixed to said second open end by said vented cap, wherein said elastomeric diaphragm has a plurality of resealable perforations therethrough,  
wherein said vented cap includes at least one slot and wherein said elastomeric diaphragm includes at least one integral tab extending from  
20 said diaphragm, and wherein said at least one integral tab is adapted to be inserted into and seal said at least one slot.

14. An apparatus for dispensing fluid, comprising:  
a reservoir having fluid dispensing means and an aperture;

a perforated elastomeric diaphragm; and  
means for mounting said elastomeric diaphragm over said aperture,  
wherein said perforated elastomeric diaphragm is affixed to said  
mounting means.

5

15. The apparatus of claim 14, further comprising means for affixing  
said perforated elastomeric diaphragm to said mounting means.

16. The apparatus of claim 15, wherein said affixing means  
10 includes at least one tab on said elastomeric diaphragm and at least one  
slot in said mounting means.

17. The apparatus of claim 16, wherein said at least one tab and  
said at least one slot are of equivalent length and curvature.

15

18. The apparatus of claim 15, wherein said means for affixing  
includes at least one tab on said mounting means and at least one slot in  
said elastomeric diaphragm.

20

19. The apparatus of claim 18, wherein said at least one tab and  
said at least one slot are of equivalent length and curvature.

20. The apparatus of claim 14, wherein said elastomeric  
diaphragm is located at a first side of said apparatus substantially opposite



a second side of said apparatus on which said fluid dispensing means is located.

21. The apparatus of claim 16, wherein said at least one tab  
5 prevents said elastomeric diaphragm from seating properly in said mounting means until said at least one tab is fully inserted into said at least one slot.

22. The apparatus of claim 18, wherein said at least one tab  
10 prevents said elastomeric diaphragm from seating properly in said mounting means until said at least one tab is fully inserted into said at least one slot.

23. A vented cap assembly mountable on a first end of a bottle,  
15 comprising:  
means for mounting said vented cap assembly to the first end of the bottle;  
an elastomeric diaphragm; and  
means for integrally affixing said elastomeric diaphragm to said  
20 mounting means.

24. The assembly of claim 23, wherein said affixing means includes at least one slot and at least one tab.

25. The assembly of claim 23, wherein the bottle has a second end, and wherein the second end is adapted to receive nipple means.

26. The assembly of claim 23, wherein said mounting means is a  
5 cap having at least one air vent.

**AMENDED CLAIMS**

[received by the International Bureau on 4 January 1999 (04.01.99);  
original claims 14, 15 and 24 cancelled; original claims 16,  
18, 20 and 23 amended; remaining claims unchanged (5 pages)]

5. The bottle assembly of claim 1, wherein said at least one integral tab has an outer contour that conforms to an outer contour of said cap adjacent said at least one slot.

6. The bottle assembly of claim 1, wherein said perforations open to permit air inflow in response to a partial vacuum formed within said bottle during feeding.

7. The bottle assembly of claim 1, wherein said vented cap includes an inverted domed base, and wherein said diaphragm is domed.

8. The bottle assembly of claim 7, wherein said inverted domed base has a contour and said diaphragm has a contour, and the contours of said inverted domed base and said diaphragm are equivalent.

9. The bottle assembly of claim 1, wherein said vented cap includes at least one venting aperture, and wherein said at least one venting aperture is of sufficient size to permit cleaning of said elastomeric diaphragm when said elastomeric diaphragm is affixed to said vented cap.

10. The bottle assembly of claim 1, wherein said at least one integral tab prevents said elastomeric diaphragm from seating properly in said vented cap until said at least one integral tab is fully inserted into said at least

11. The bottle assembly of claim 1, wherein said at least one integral tab is visible from outside said bottle assembly when said at least one integral tab is inserted into said at least one slot.

12. The bottle assembly of claim 1, wherein said elastomeric diaphragm is made of a moldable elastomer.

13. A bottle assembly comprising:  
a bottle having a first open end and a second open end;  
a nipple assembly removably affixed to said first open end;  
a vented cap removably affixed to said second open end, said vented cap having at least one slot; and  
an elastomeric diaphragm removably affixed to said second open end by said vented cap, said elastomeric diaphragm having a plurality of resealable perforations therethrough, and having at least one integral tab extending therefrom,

wherein said at least one integral tab is adapted to be inserted into and seal said at least one slot.

16. An apparatus for dispensing fluid, comprising:  
a reservoir having a top aperture, a bottom aperture and fluid dispensing means operative at said top aperture;  
a perforated elastomeric diaphragm apart from said fluid dispensing means and operative at said bottom aperture;

means for mounting said elastomeric diaphragm over said bottom aperture; and

means for affixing said perforated elastomeric diaphragm to said mounting means, said affixing means having at least one tab on said elastomeric diaphragm and at least one slot in said mounting means,

wherein said perforated elastomeric diaphragm is removably affixed to said mounting means.

17. The apparatus of claim 16, wherein said at least one tab and said at least one slot are of equivalent length and curvature.

18. An apparatus for dispensing fluid, comprising:  
a reservoir having fluid dispensing means and an aperture;  
a perforated elastomeric diaphragm;  
means for mounting said elastomeric diaphragm over said aperture;  
and

means for affixing said perforated elastomeric diaphragm to said mounting means, said means for affixing having at least one tab on said mounting means and at least one slot in said elastomeric diaphragm,

wherein said perforated elastomeric diaphragm is removably affixed to said mounting means.

19. The apparatus of claim 18, wherein said at least one tab and said at least one slot are of equivalent length and curvature.

20. The apparatus of claim 16, wherein said elastomeric diaphragm is located at a first side of said apparatus substantially opposite a second side of said apparatus on which said fluid dispensing means is located.

21. The apparatus of claim 16, wherein said at least one tab prevents said elastomeric diaphragm from seating properly in said mounting means until said at least one tab is fully inserted into said at least one slot.

22. The apparatus of claim 18, wherein said at least one tab prevents said elastomeric diaphragm from seating properly in said mounting means until said at least one tab is fully inserted into said at least one slot.

23. A vented cap assembly mountable on a first end of a bottle, comprising:

means for mounting said vented cap assembly to the first end of the bottle;

an elastomeric diaphragm; and


means for affixing said elastomeric diaphragm to said mounting means, said affixing means having at least one tab on said elastomeric diaphragm and at least one slot in said mounting means,

wherein said perforated elastomeric diaphragm is removably affixed to said mounting means.

25. The assembly of claim 23, wherein the bottle has a second end, and wherein the second end is adapted to receive nipple means.


26. The assembly of claim 23, wherein said mounting means is a cap having at least one air vent.

1/4

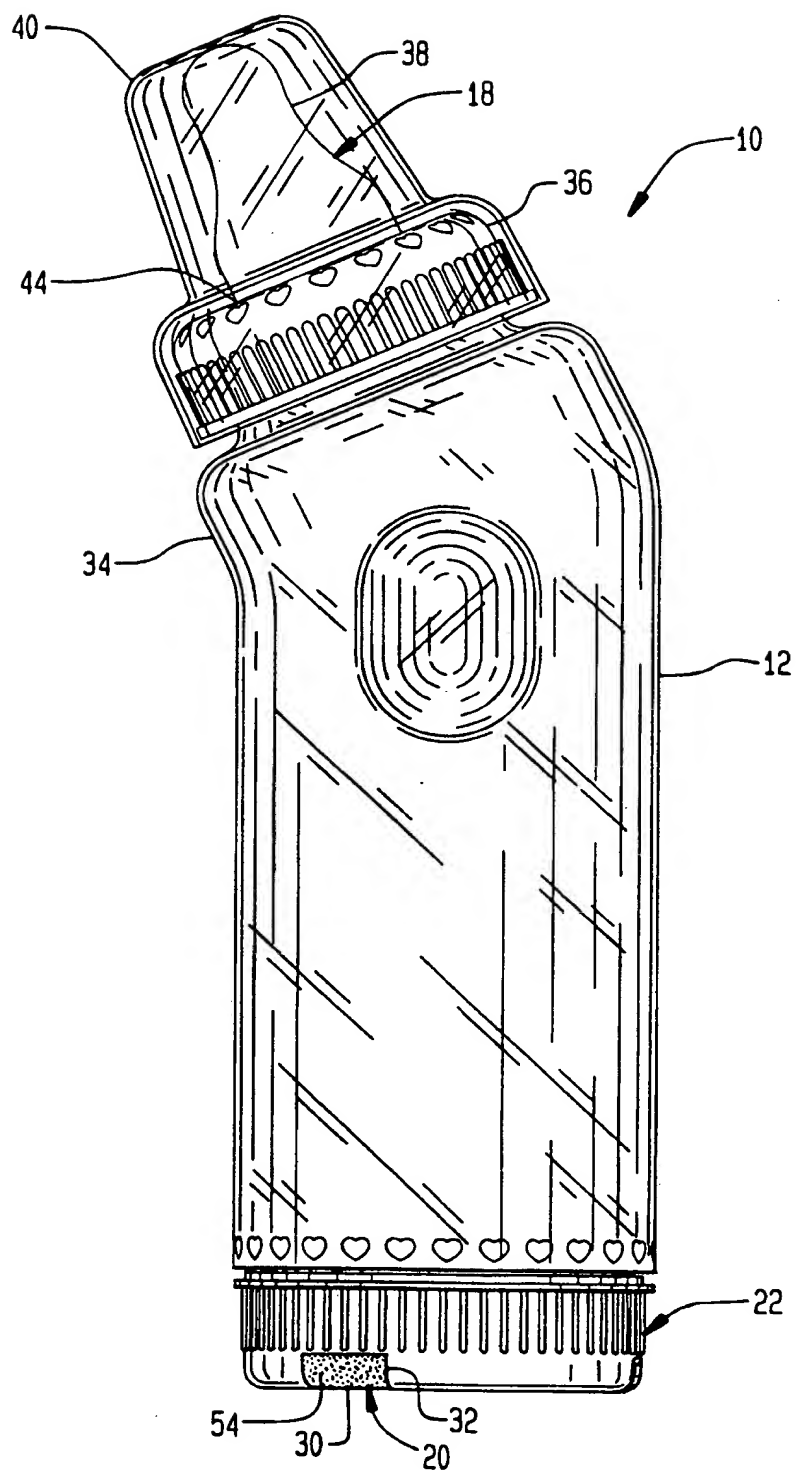


**FIG. 1**

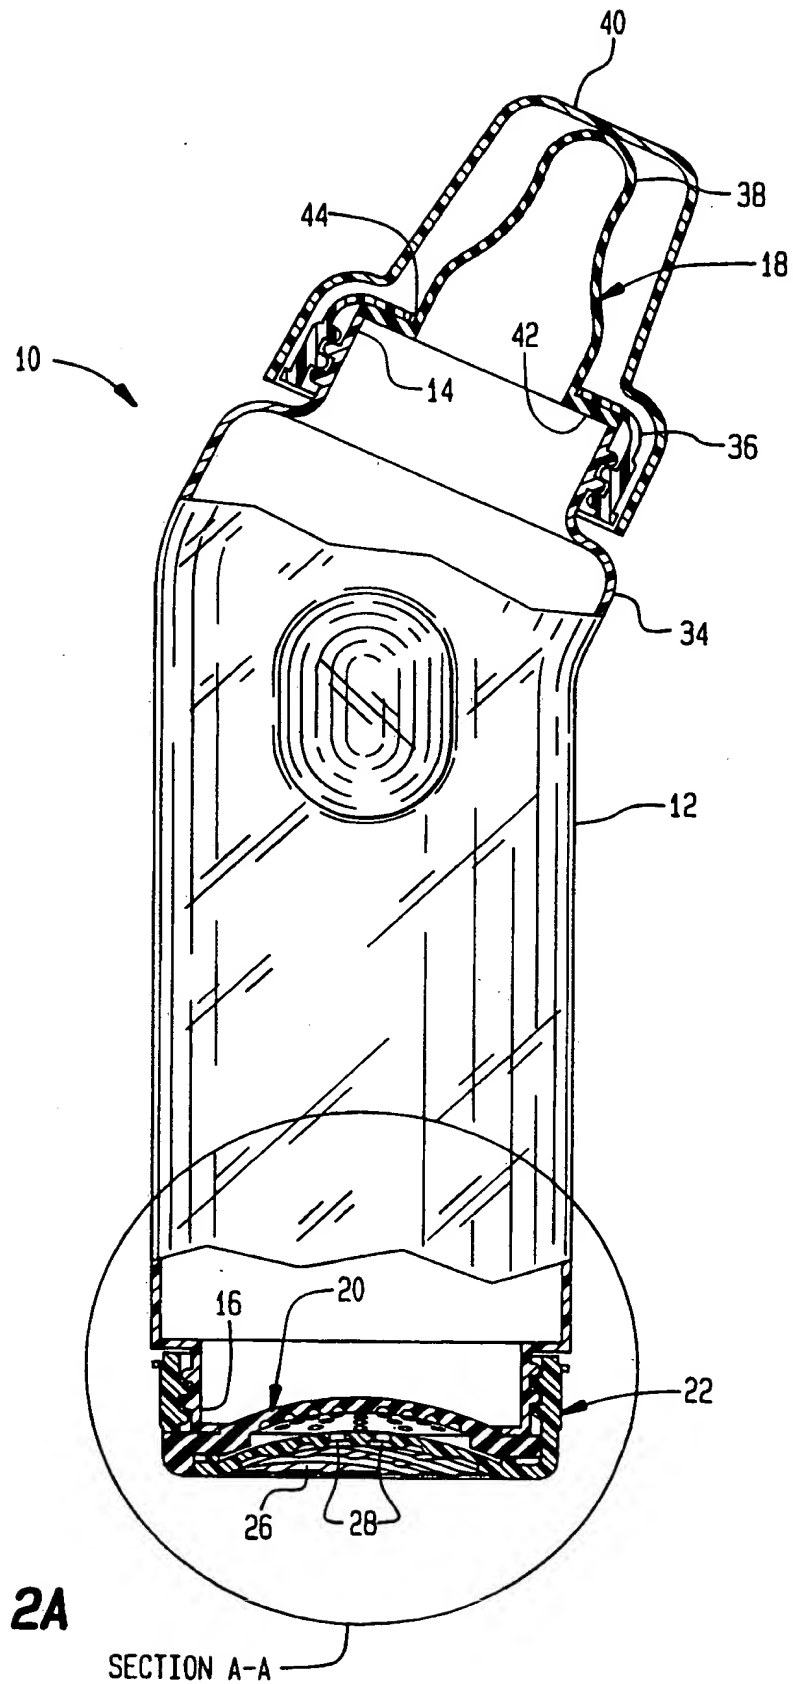


**FIG. 2A**


SECTION A-A

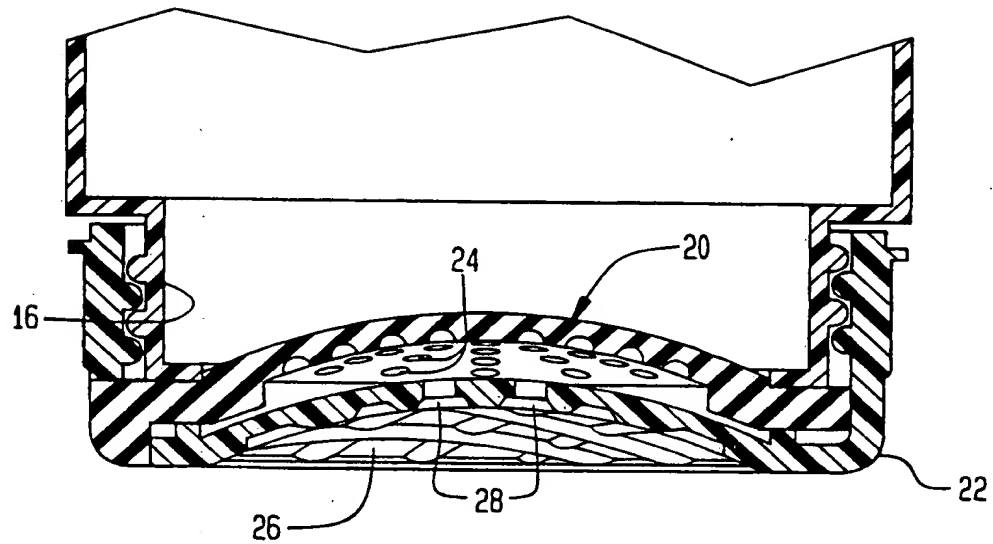


**FIG. 2B**

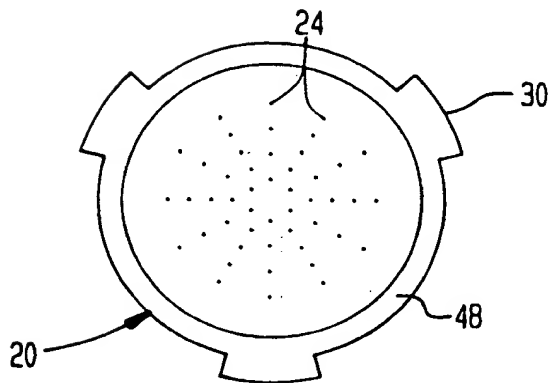


**FIG. 3**

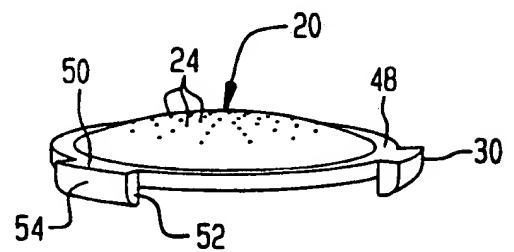

**FIG. 4**

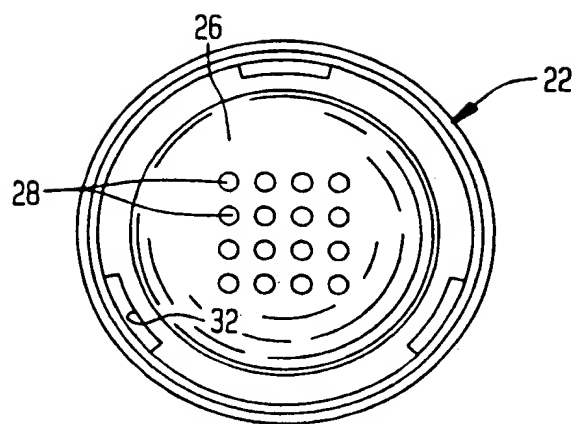

**FIG. 5**

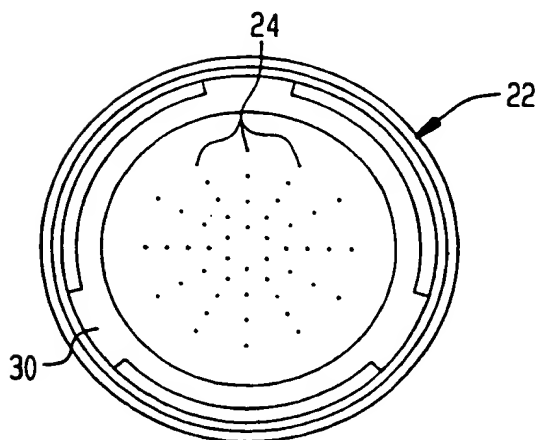

**FIG. 6**

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/10347

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : A61J 9/00, 9/04

US CL : 215/ 11.1, 11.5

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 215/ 11.1, 11.4, 11.5

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2,774,500 A (BUDIANI) 18 DECEMBER 1956, note Figures 7 and 9.	14, 15 and 20
X --- Y	US 5,499,729 A (GREENWOOD ET AL) 19 MARCH 1996, see Figures 18-21.	23, 25 and 26 ----- 1-26
Y	US 2,060,212 A (HERSTEIN) 10 NOVEMBER 1936, see Figures 4 and 5.	1-3, 6, 9, 11-16. 18, 20 and 23-26
Y	US 2,365,947 A (GANSON) 26 DECEMBER 1944, see Figures 1 and 3.	1-3, 6, 9, 11-16, 18, 20 and 23-26

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
*C* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 03 AUGUST 1998	Date of mailing of the international search report <b>24 AUG 1998</b>
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer SUE A. WEAVER Telephone No. (703) 308-1148 <i>Special Vency</i> <i>Paralegal Specialist</i> <i>Group 3700</i>

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/10347

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 9,007,320 A (DUFORT) 12 JULY 1990, see Figure 3.	1, 2, 4-10 and 12-26
Y	US 5,601,199 A (MARTY) 11 FEBRUARY 1997, see Figure 3.	2
A	US 4,723,668 A (CHENG) 09 FEBRUARY 1988	
A	US 4,401,224 A (ALONSO) 30 AUGUST 1983	
A	US 2,982,432 A (MEHL) 02 MAY 1961	
A	GB 2,238,729 A (SIDI ET AL) 12 JUNE 1991	